



HIGH DENSITY

# Permablock

## Permapipe's high density Permablock is the perfect solution for a durable, long life pipe support.

The strong sisal vapour barrier coupled with the closed cell high density inorganic polyurethane makes Permablock ideal for high humidity environments, as it won't absorb moisture and will never rot. Neoprene sealing tape completes the vapour barrier and ensures a fully encapsulated seal.

Low thermal conductivity minimises the potential for heat gain or loss, ensuring maximum efficiency.

With a simple one step installation process eliminating the need for cutting and taping, Permablock is quick, easy and safe to use.


The high density inorganic Permablock suits all standard pipe sizes and wall thicknesses and is recommended for use on pipe sizes greater than 100 mm nominal bore. Custom sizes are also available to order.

**Choose Permablock for optimum performance even in the most demanding applications.**

- ✓ Strong sisal vapour barrier
- ✓ Neoprene sealing tape
- ✓ Low thermal conductivity
- ✓ Simple one step install

Material	Closed cell polyurethane foam
Application	Pipe support ferrule
Density	160 kg/m <sup>3</sup> nominal
Moisture absorption	<1% by volume
Thermal conductivity	0.035 W/mk (+/-0.002)
R-value at 50mm*	R1.42
Constant working temperature	-30°C to +100°C
Compressive strength	2250 kPa

\*R-value stated is for flat surfaces. R-values for curved surfaces vary depending on the surface diameter. Please contact Permapipe Systems for further information.

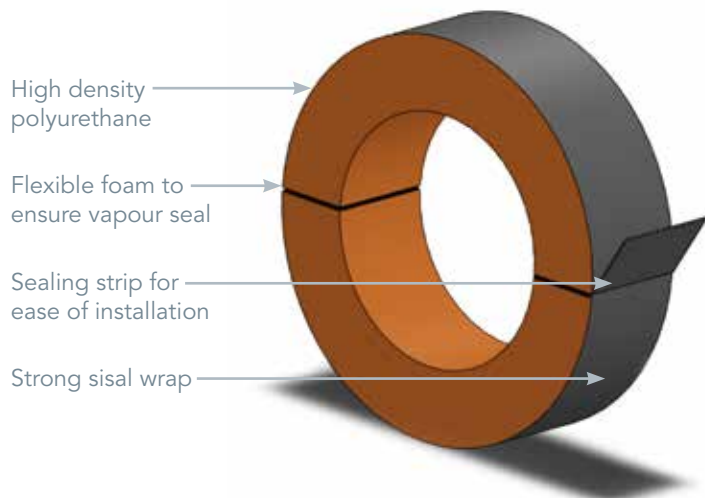

**Permapipe**  
SYSTEMS AUSTRALIA

[www.permapipe.com.au](http://www.permapipe.com.au)

P: +61 7 3200 2801  
 F: +61 7 3200 7725  
 E: [mail@permapipe.com.au](mailto:mail@permapipe.com.au)  
 PO Box 10, Waterford QLD 4133

Quality Certified Company



AS/NZS ISO 9001:2008  
 Certificate Number: 263012014